



How to bind the HQS-Web-Service in C#

1. Create a new Windows Application Project.

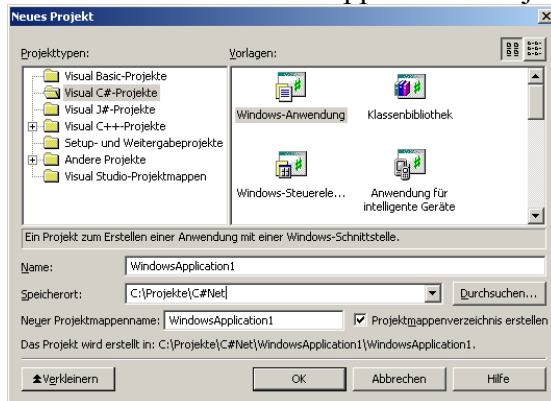


2. Choose "Add Web reference" in the Projectmenu and enter the URL


<http://ccs.fax.de/xmlws3.exe>

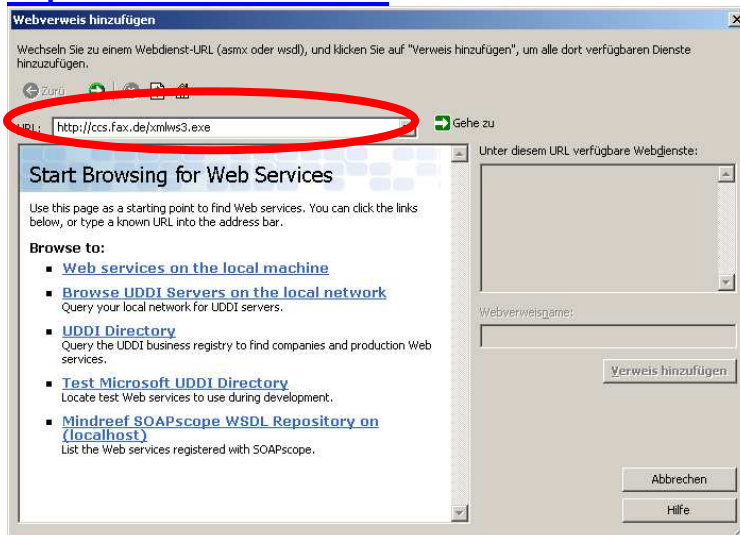


3. Click on the link [WSDL](#) next to IXMLWS2.

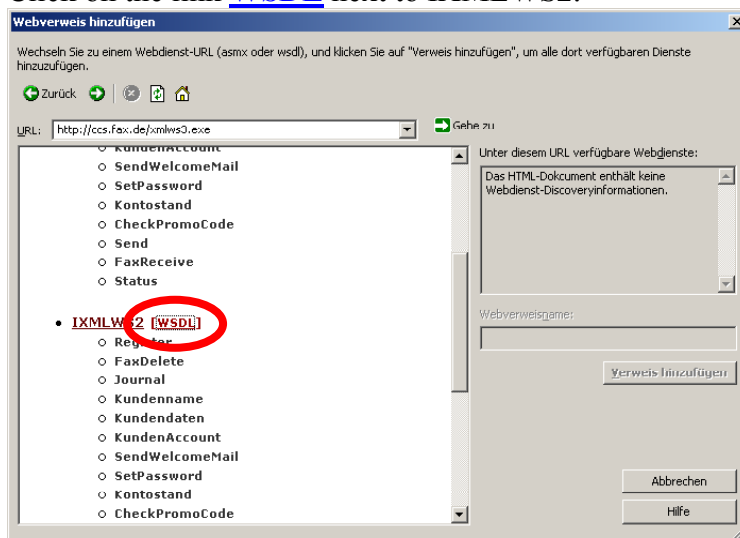


4. Give a name to your reference, i.e. Fax_de.

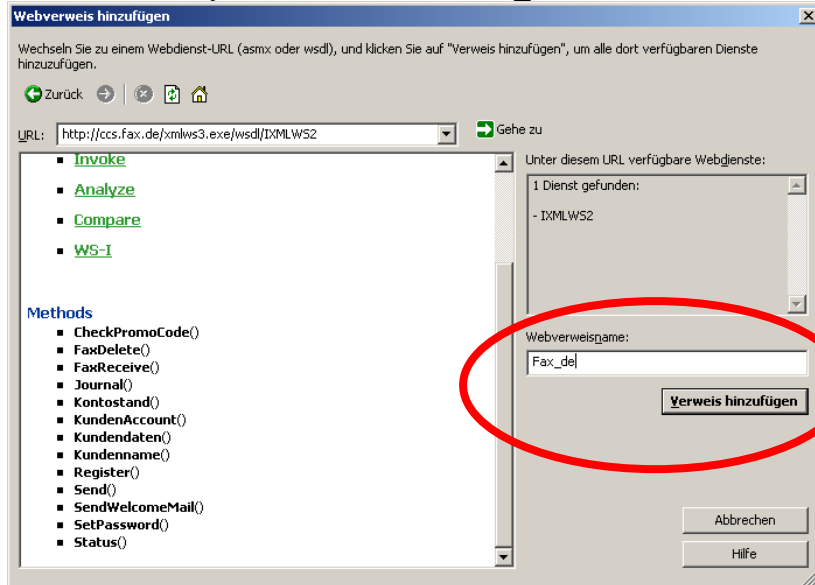

5. Click “add reference”. The IDE will now generate a new proxy class. Click the “see all files” icon in the header of the Project Explorer. You should be able to see the following now.

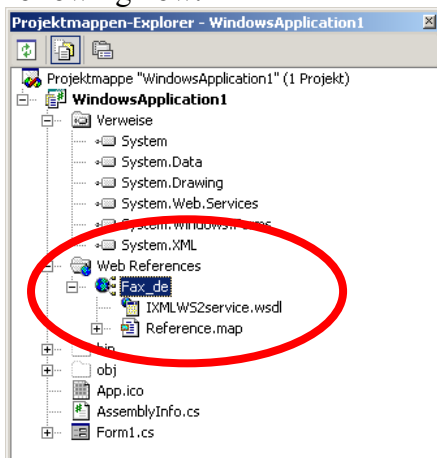

6. In the Objectbrowser you can view all HQS-Web-Service methods.

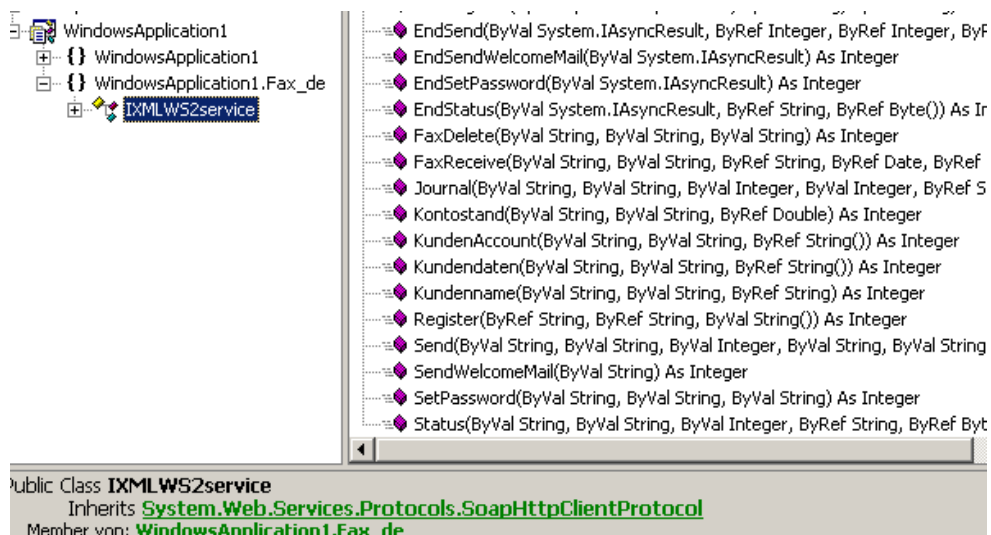

7. Create a new instance of your proxy class. i.e.

```
Fax_de.IXMLWS2service faxService=new Fax_de.IXMLWS2service();
```

This instance enables you to call all the methods of the web service. i.e.

```
FaxService.SendWelcomeMail(txtAccount.Text);
```

